


# L88P 88 Plus/ L88P-A 88 Plus

**JBL**

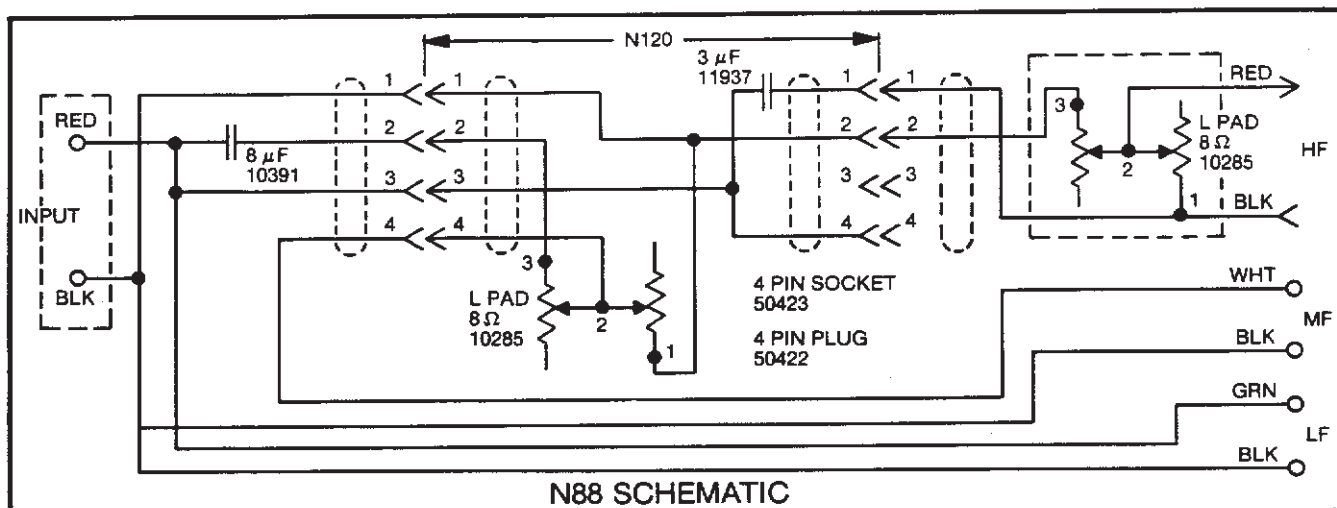

## SYSTEM COMPONENTS:

**LOW FREQUENCY DRIVER:** 123A-1  
Cone Kit: C8R2212  
Nom. Impedance: 8 Ohm  
Dynamic Test Input V: 6  
Sweep Frequency Hz: 20-1200  
D.C. Resistance Ohms: 4.5 minimum  
5.5 maximum

Gap Gauge: .044"  
Notes: Aquaplas  
If Not Serviceable, 2213H  
Replace With: (Reverse Polarity)  
Visual Change: Yes  
Baffle Modification: No  
Exact Acoustic Replacement: No.  
Slightly Different. Replace both units in a stereo pair.

Additional Parts Currently Available\*:  
Dome: 31385  
Trim Gasket: 32756

**MID RANGE DRIVER:** LE5-2  
(Included in M12 Expander Kit)  
Cone Kit: C8RLE52  
Nom. Impedance: 8 Ohm  
Dynamic Test Input V: 4  
Sweep Frequency Hz: 75-3000  
D.C. Resistance Ohms: 5.5 minimum  
6.5 maximum

Gap Gauge: .040"  
Notes: Dome Inverted  
If Not Serviceable,  
Replace With: LE5-10  
Visual Change: Yes  
Baffle Modification: No  
Exact Acoustic Replacement: No.  
Slightly Different. Replace both units in a stereo pair.

Additional Parts Currently Available\*:  
Dome: 54721  
Trim Gasket: 29931

**HIGH FREQUENCY DRIVER:** LE25  
Diaphragm Kit: D8RLE25  
Nom. Impedance: 8 Ohm  
Dynamic Test Input V: 3  
Sweep Frequency Hz: 500-1200  
D.C. Resistance Ohms: 3.7 minimum  
4.2 maximum

Gap Gauge: .029"  
Notes:  
If Not Serviceable,  
Replace With: 035TiA  
Visual Change: Yes  
Baffle Modification: Yes  
Exact Acoustic Replacement: No.  
Slightly Different. Replace both units in a stereo pair.

Additional Parts Currently Available\*:  
Trim Ring: 50402  
Mounting Gasket: 50949-01  
Dome: 21606

## SYSTEM SPECIFICATIONS:

Nominal Impedance: 8 Ohm  
Power Capacity: 35 Watts Continuous  
Program (50 Watts Continuous Program w/M12)  
Crossover Frequencies: 2000 Hz  
(1500 and 6000 Hz w/M12)  
Sensitivity: 76dB (1 Watt @ 15 Feet)  
Enclosure Dim: 14-1/4" x 23-1/2" x 11-3/4" D  
36cm x 60cm x 30cm

Shipping Weight:  
Additional Parts Currently Available\*:  
Grill: G88-Cloth  
Binding Posts: Red: 10243  
Black: 10244

## SYSTEM NOTES:

Optional M12 Expander Kit was available which included LE5-2 Midrange and N120 Crossover Module. Kit is no longer available.

\*Other parts may also be available. Check with JBL for details.